

WASTE WATER PUMPS

D120GG001	Impeller lower cover
D120GG002-3	Motors body
D120GG007	Impeller
D120GG12	Lower bearing cover
D120GG012-3	Rotor piece
D120GG13	Upper bearing cover
D120GG015-3	Stator piece
RULMAN	Bearing
Keçe (Mekanik)	Mechanical seal
D120GG023	Upper support cover

WASTE WATER PUMPS USAGE PLANTS

- * Industrial plants
- * Tourism plants
- * Sea and ships plants
- * Constructions, floor water and refinement water
- * Fire departmentants
- * Domestic applications for discharge of rain, flood, river and lake waters by pressure.

TECHNICAL SPECIFICATIONS

* For clean and dirty liquids up to 40°C heat.


* Up to (mechanics) 35 mm piece

* Motor is oil-cooled


* Motor protection class : IP 68

* Insulation class : F

* Max. start : 20 Start/Saat

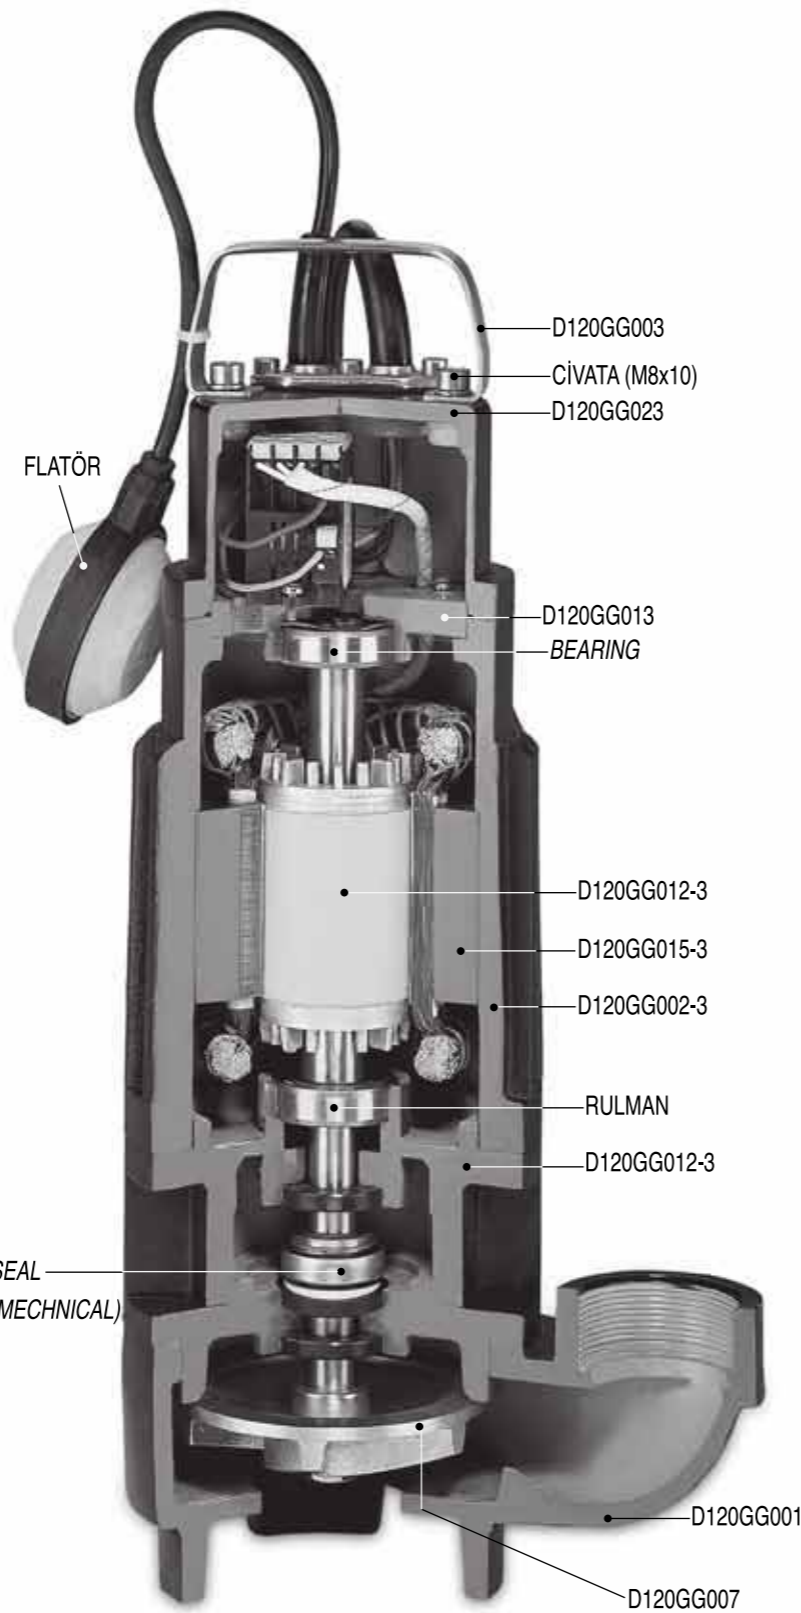

D135 GG WASTE WATER PUMP SERIES

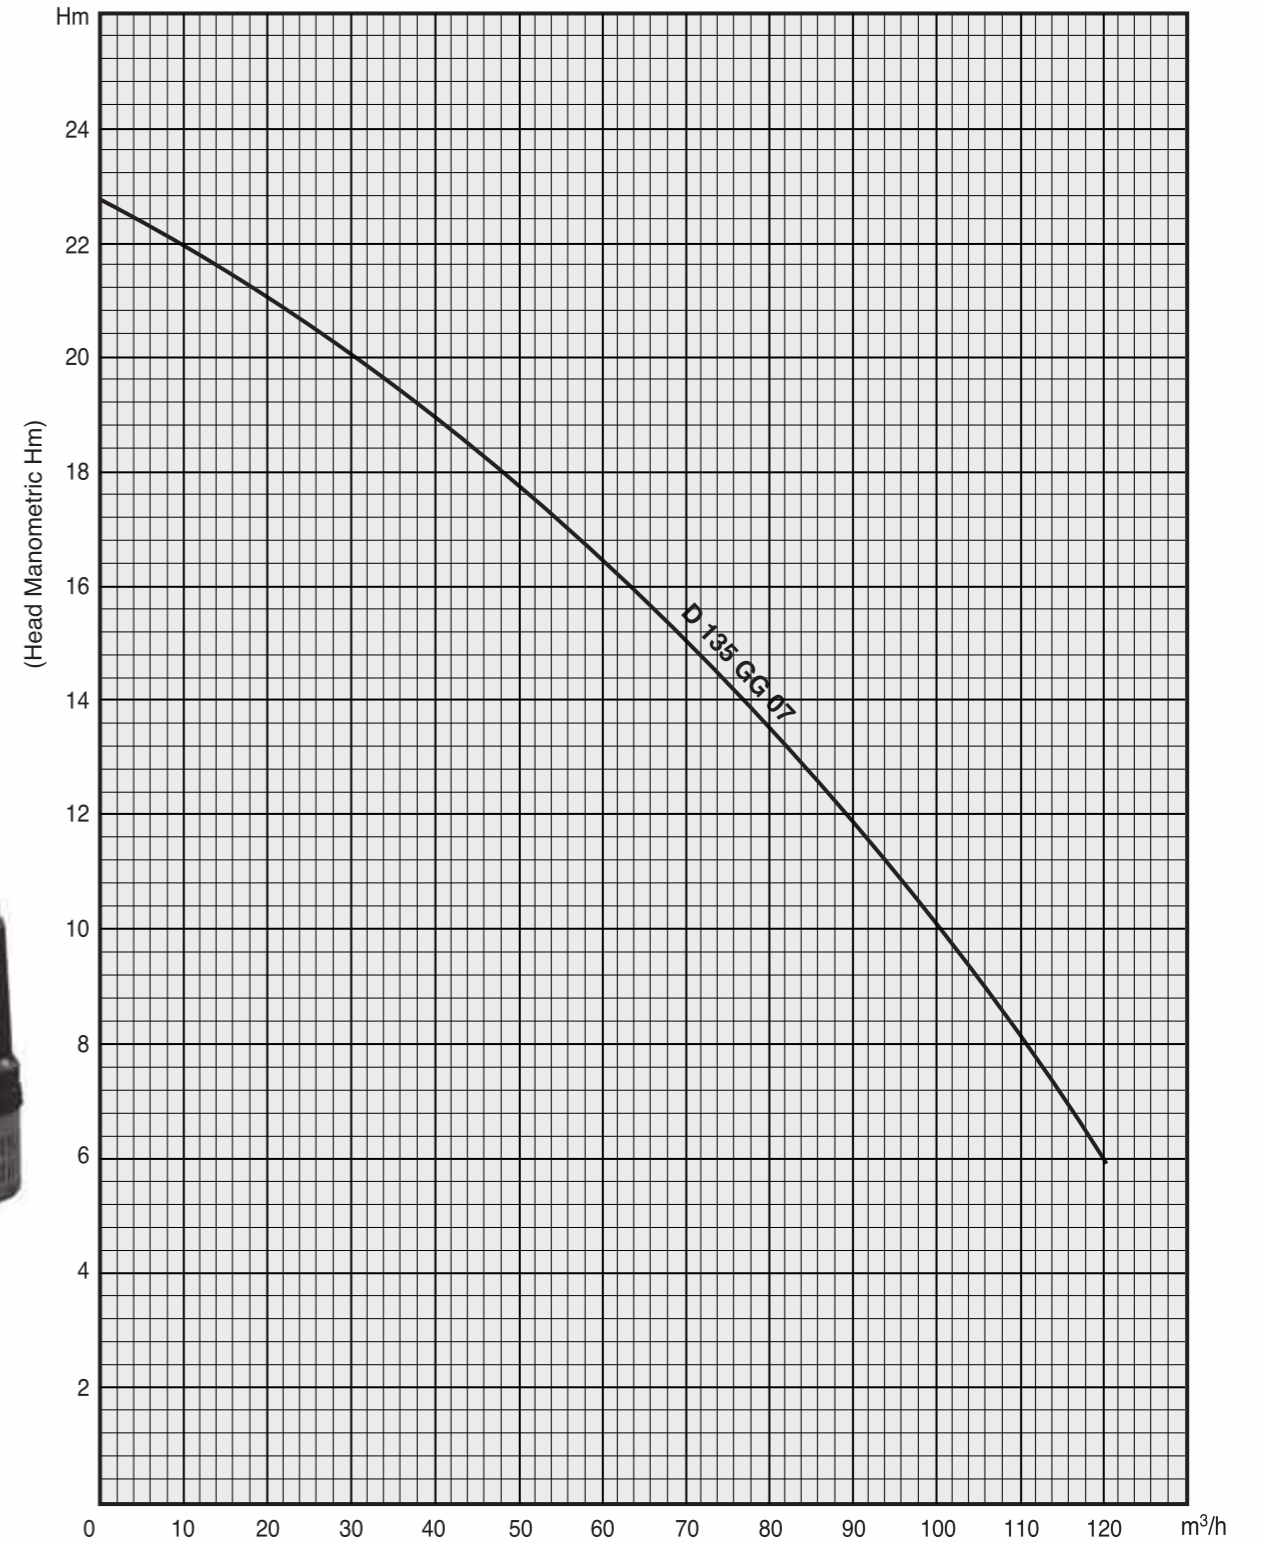

WASTE WATER PUMP TYPE	HP	KW	AMPER		Lt/s m³/h	Basma Yüksekliği (Hm)										
			220 V	380 V		0	2,77	5,55	8,33	11,11	13,89	16,67	19,44	22,22	25,00	27,78
D 135 GG 07	7,5	5,5	-	12	23	22	21	20	19	17,5	16,5	15	13,6	12	10	8

WASTE WATER PUMP TYPE	HP	KW	AMPER	H	D	H1	L	KG
			220 V 380 V					
D 135 GG 07	7,5	5,5	- 12	80	4"	-	36	133

We reserve the rights to make changes.